




# Removable Bollard 1000mm Above Ground 168mm - 219mm Diameter Galvanised or Galvanised & Colour

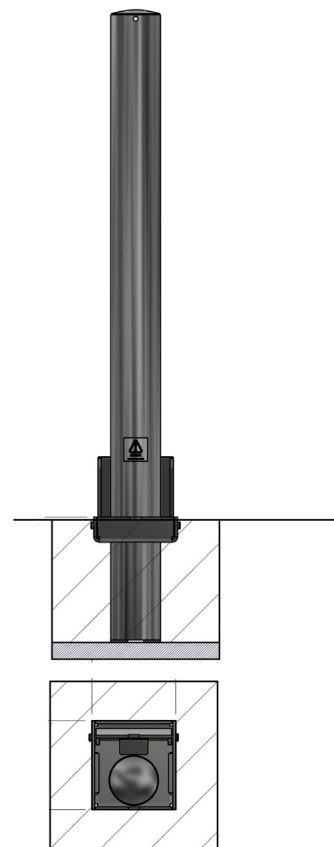

The Removable Bollard offers an effective, simple and robust way to protect premises and vehicles. Removable Bollards are particularly suitable for locations where occasional access is required, the simple tab and padlock system provides an easy to operate solution for locking the bollard in place. The Removable Bollard is 1,000mm above ground and is available in a range of outside tube diameter sizes from 60mm through to 219mm. Padlock to secure is available at an extra cost. Padlock to secure is available at an extra cost.

The Removable Bollard 1000 is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways and can be used in conjunction with fixed bollards as part of a security system for all types of premises.

| Part Number  | Description                           | Lift Weight (kg) | Weight (kg) |
|--------------|---------------------------------------|------------------|-------------|
| 138 121 705  | 168mm Galvanised - Removable          | 28kg             | 41kg        |
| 138 121 708B | 168mm Galvanised & Black - Removable  | 28kg             | 41kg        |
| 138 121 708  | 168mm Galvanised & Colour - Removable | 28kg             | 41kg        |
| 138 121 800  | 193mm Galvanised - Removable          | 33kg             | 46kg        |
| 138 121 810B | 193mm Galvanised & Black - Removable  | 33kg             | 46kg        |
| 138 121 810  | 193mm Galvanised & Colour - Removable | 33kg             | 46kg        |
| 138 121 919  | 219mm Galvanised - Removable          | 37kg             | 50kg        |
| 138 121 919B | 219mm Galvanised & Black - Removable  | 37kg             | 50kg        |
| 138 121 919C | 219mm Galvanised & Colour - Removable | 37kg             | 50kg        |

## Product details

- 1000mm (Height above ground)
- 5mm wall thickness
- Socket - 300mm (below ground)
- Price excludes padlock to secure

## Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



[www.autopa.co.uk](http://www.autopa.co.uk)  
+44 (0)1788 550556

AUTOPA Limited  
Cottage Leap, Rugby, Warwickshire CV21 3XP

